



Simple. Natural. Hardwoods®

HICKORY

Scientific Name: *Carya App Illinoisensis*

Hickory, harvested from the Glacial and Appalachian regions, is recognized for its remarkable durability and distinctive aesthetic. Its typically straight grain, coupled with potential wavy or irregular patterns, contributes to a coarse texture that complements both rustic and sophisticated designs.

Renowned for its exceptional hardness and impact resistance, Hickory is suited for high-traffic flooring and heavy-duty applications. Its natural color variation, from creamy whites to deep browns, allows for a striking visual contrast, making it ideal for statement pieces that require both resilience and beauty. Hickory stains remarkably well and all the color variations are leveled out when stained.

What's Hickory Used For?

- Cabinetry
- Furniture
- Flooring
- Doors
- Millwork
- Case Goods
- Tool Handles
- Ladders
- Pick and Axe Handles



© Fusion Designs



© Crystal Cabinets



© Crystal Cabinets



© Crystal Cabinets

Why Hickory?

- Exceptional hardness
- Impact-resistant
- Striking color/grain contrast
- Durable for heavy-use
- Rustic or sophisticated finish
- Finishes well

Quick Fact

Hickory is used for smoking meats, imparting a distinctive flavor that's cherished by barbecue enthusiasts.




Learn
More





Simple. Natural. Hardwoods®

Hickory

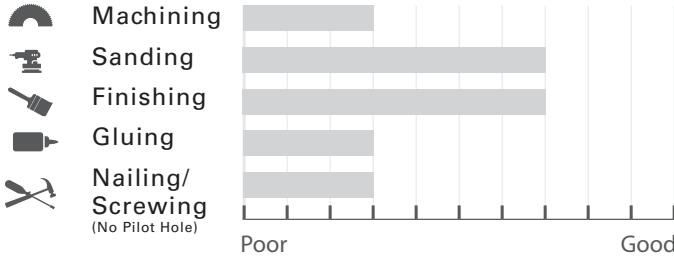

Weight per Bdft: 4.14
Specific Gravity (Density): 0.67
Hardness (Janka): 1820
Bending Strength (MOR): 13700
Bending Stiffness (million psi) (MOE): 1.730
Dimensional Movement (Shrinkage): R 4.9%, T 8.9%
T/R Ratio (Stability): 1.9



Grades We Offer




Prime



#1 Common



#2 Common

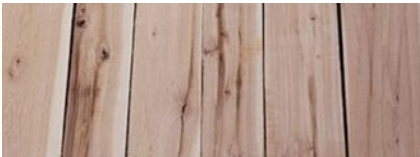

Rustic

North American Hardwood Species Comparison Chart

Lumber (12% Moisture Content)	Machining	Sanding	Finishing	Gluing	Nailing/ Screwing (No Pilot Hole)	Weight per bdft	Specific Gravity (Density)	Hardness (Janka)	Bending Strength (MOR)	Bending Stiffness (million psi) (MOE)	Dimensional Movement (Shrinkage)		T/R Ratio (Stability)
											R (%)	T (%)	
Alder	10	10	10	9	7	2.45	.41	590	9800	1.380	4.4	7.3	1.7
Ash	9	10	9	8	6	3.56	.61	1320	15000	1.740	4.9	7.8	1.6
Basswood	10	10	9	8	8	2.50	.37	410	8700	1.460	6.6	9.3	1.4
Cherry	10	9	10	9	7	3.07	.52	950	12300	1.490	3.7	7.1	2.2
Hickory	3	7	7	3	3	4.14	.67	1820	13700	1.730	4.9	8.9	1.9
Hard Maple	9	8	10	9	4	3.73	.64	1450	15800	1.830	4.8	9.9	2.1
PC Maple	9	9	10	9	5	2.74	.50	850	10700	1.450	3.7	7.1	1.9
Soft Maple	8	9	10	9	5	3.19	.55	950	13400	1.640	4.0	8.2	2.1
Red Oak (Northern)	10	10	9	9	7	3.64	.63	1220	14380	1.761	4.0	8.6	2.2
Oregon White Oak	9	9	9	8	8	4.34	0.72	1640	10200	1.090	4.2	9.0	2.1
White Oak (Eastern)	9	10	9	7	7	3.94	.68	1350	14380	1.762	4.4	8.8	2.0
Poplar	9	8	10	9	6	2.81	.43	540	10100	1.580	4.6	8.2	1.8
Walnut	9	8	9	7	7	3.36	.56	1010	14600	1.680	5.5	7.8	1.4
Yellow Birch	10	8	10	8	2	3.53	.62	1260	16600	2.010	7.3	9.5	1.3